




OWNER'S MANUAL

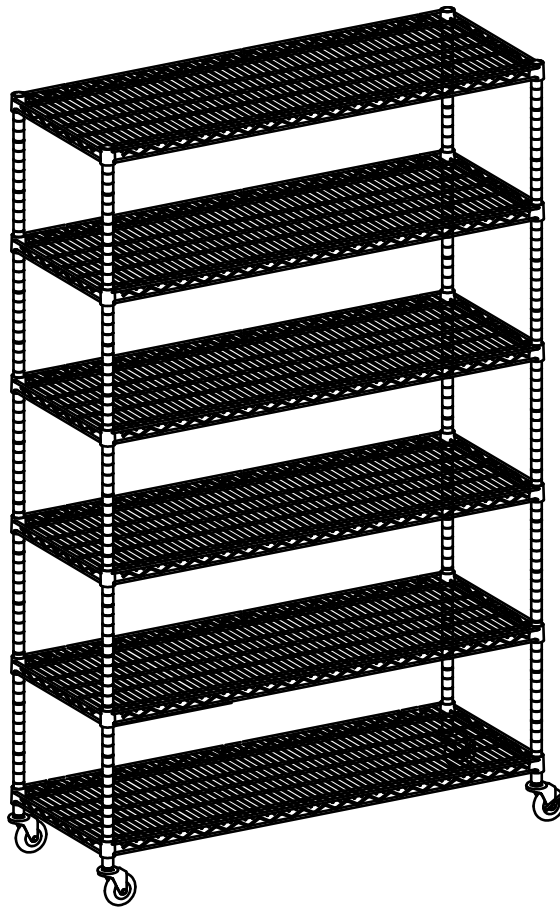

**TRINITY ECOSTORAGE® 6-TIER NSF WIRE SHELVING RACK
W/ WHEELS – CHROME
MODEL # TBFZ-0945**


PARTS LIST

Your TRINITY EcoStorage® 6-Tier NSF Wire Shelving Rack w/ Wheels should include the following parts. Please inspect box contents to ensure you have received all components.

If you are missing any parts, need assistance with assembly or have questions, please contact TRINITY Customer Service: 800.985.5506 or customerservice@trinityii.com. Parts can also be requested online at www.trinityii.com (Help & More, Contact Us).


You will need no additional tools for assembly.

A




TOP POLE (4)
End Cap (4) and
Pole Connector (4)
are pre-installed

B



BOTTOM POLE (4)
Threaded Insert (4)
is pre-installed

C




SHELF (6)

D



SLIP SLEEVE
(48) + (2) Extra

E



LOCKING
CASTER (2)

F



NON-LOCKING
CASTER (2)

G



WRENCH (1)

H



FEET LEVELER (4)

For Stationary option

I



THREADED
INSERT (4)

J




END CAP (4)

Used when making (2) 3-Tier Racks

ASSEMBLY INSTRUCTIONS


STEP 1

Screw LOCKING CASTER (E) and NON-LOCKING CASTER (F) into the bottom of BOTTOM POLE (B). Turn clockwise to screw in place. Make sure LOCKING CASTERS (E) are on the same side.

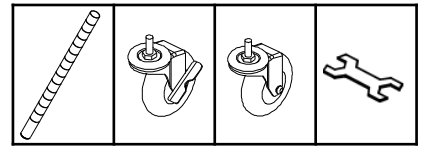

B (4) E (2) F (2) G (1)

Warning: Use the included WRENCH (G) to tighten CASTERS (E & F) to BOTTOM POLES (B) completely. Failure to do as instructed could result in the caster stem breaking.

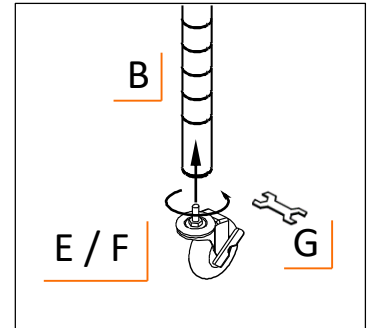


STEP 2

On BOTTOM POLE (B), place 1 pair of SLIP SLEEVES (D) at the desired level with the arrow on SLIP SLEEVE (D) facing up and the word "TOP" right side up. Slide the pair of SLIP SLEEVES (D) until you hear a click to confirm the pair is locked onto BOTTOM POLE (B). DO NOT place more than one pair on one BOTTOM POLE (B) at a time.

Do this for each BOTTOM POLE (B) and make sure all (8) SLIP SLEEVES (D) on BOTTOM POLES (B) are at the same level.

Note: For stability, the lowest SLIP SLEEVES (D) should be installed **no higher** than the 3rd indentation from the caster end of BOTTOM POLES (B).

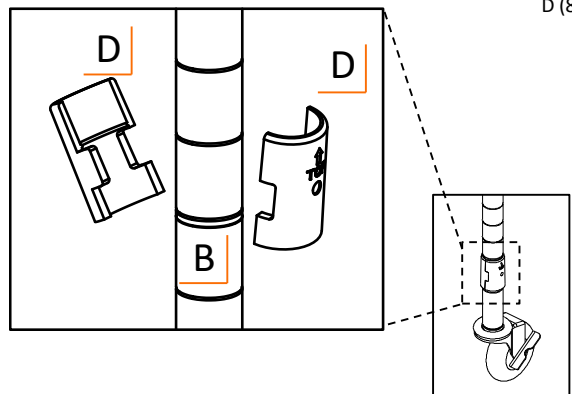


D (8)

ASSEMBLY INSTRUCTIONS

STEP 3


Slide (4) BOTTOM POLES (B) through the corner cylinders of SHELF (C). Make sure SHELF (C) corner cylinders are positioned over SLIP SLEEVES (D).



D (16)

C (2)

Repeat STEP 2 of placing SLIP SLEEVES (D) on BOTTOM POLES (B) and assemble one more SHELF (C).

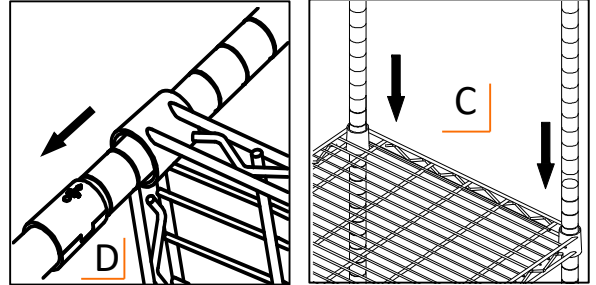


Note:

- The level side of SHELF (C) is the TOP side (the TRINITY logo on the corner cylinders should be right-side up.)
- Use a rubber mallet, if needed, to secure SHELF (C).
- For convenience, place BOTTOM POLES (B) with Locking Casters on the long side of the shelf if the rack will be pushed against a wall OR if the rack is frequently rolled around like a cart, place BOTTOM POLES (B) with Locking Casters on the side being pushed or pulled.

STEP 4

Screw TOP POLE (A) into BOTTOM POLE (B) by the pre-installed pole connector. The tops of TOP POLE (A) are indicated by BLACK END CAP.





A (4)

D (32)

C (4)




Repeat STEP 2 of placing SLIP SLEEVES (D) on BOTTOM POLES (B) and STEP 3 to assemble other (4) SHELVES (C) to complete the 6-Tier Shelving Rack.

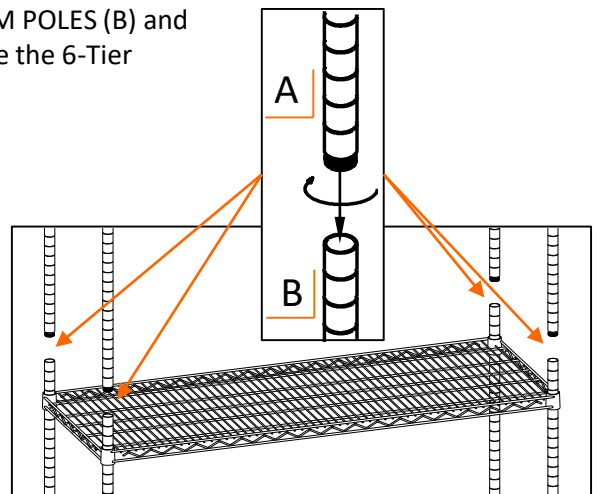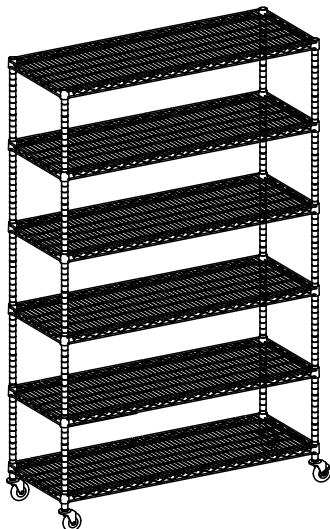

ASSEMBLY INSTRUCTIONS

Stationary Option

In STEP 1, instead of screwing CASTERS into the bottoms of BOTTOM POLES (B), screw in (4) FEET LEVELERS (H). Turn clockwise to screw in place. Repeat STEPS 2 – 4. Adjust FEET LEVELERS (H) as needed so that the Shelving Rack is stable on the floor.



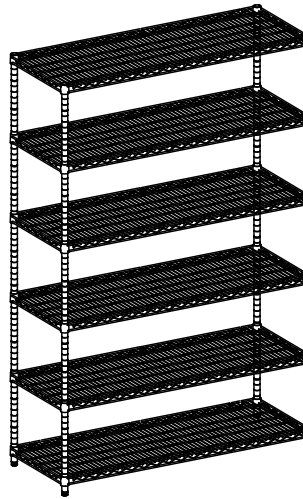



Making (2) 3-Tier Racks Option

REPEAT STEPS 1 - 3


STEP 4

Push in (4) END CAPS (J) into the tops of BOTTOM POLES (B). Place (8) SLIP SLEEVES (D) on the last indentation of (4) BOTTOM POLES (B) and place SHELF (C) corner cylinders onto SLIP SLEEVES (D) to complete one 3-Tier Rack with Casters.

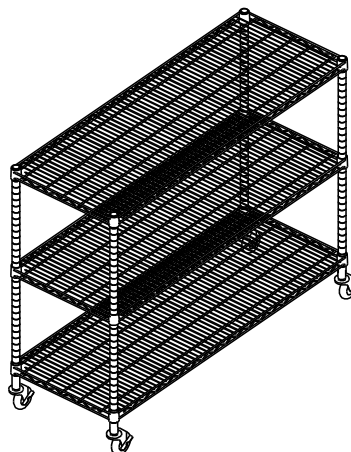

ASSEMBLY INSTRUCTIONS

STEP 5




A (4)



I (4)

H (4)

Unscrew (4) the pre-installed pole connectors from the bottoms of TOP POLES (A) and screw in THREADED INSERTS (I). Screw (4) FEET LEVELERS (H) into THREADED INSERTS (I).

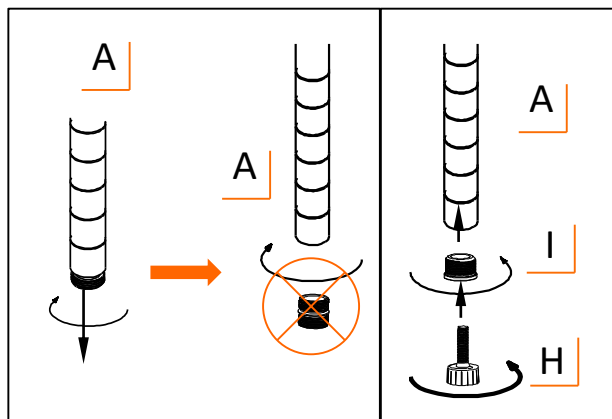


STEP 6

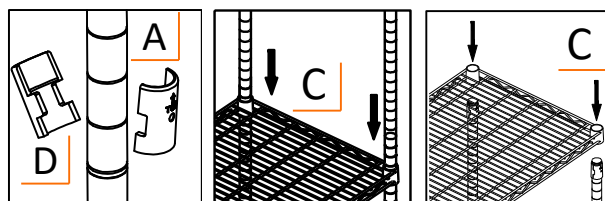

D (24)

C (3)


Following STEPS 1 – 3, assemble (3) SHELVES (C) onto TOP POLES (A) to complete another 3-Tier Rack with Feet Levelers.

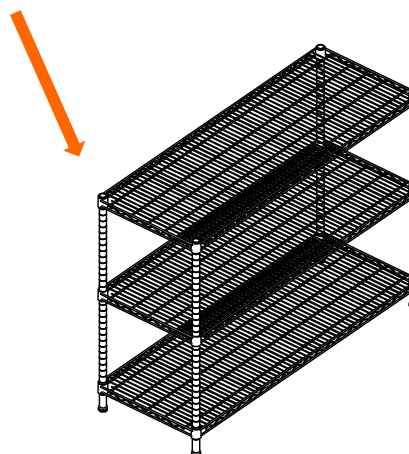

SERVICE PARTS LIST – TBFZ-0945

TRINITY Customer Service provides the following replacement parts:

	Part Number	Description		Part Number	Description
1)	XBK-23-004-2517	End Cap	7)	XBK-01-011-2543	Slip Sleeve
2)	ZSV-04-006-3600	Top Pole	8)	XXX-97-002-0001	Wrench
3)	ZSV-01-013-2523	Pole Connector	9)	ZSV-99-007-4010	Non-locking Caster
4)	ZSV-04-042-3600	Bottom Pole	10)	ZSV-01-014-2513	Threaded Insert
5)	ZSV-99-008-4010	Locking Caster	11)	XBK-98-003-2538	Feet Leveler
6)	ZSV-03-050-4818	Shelf			

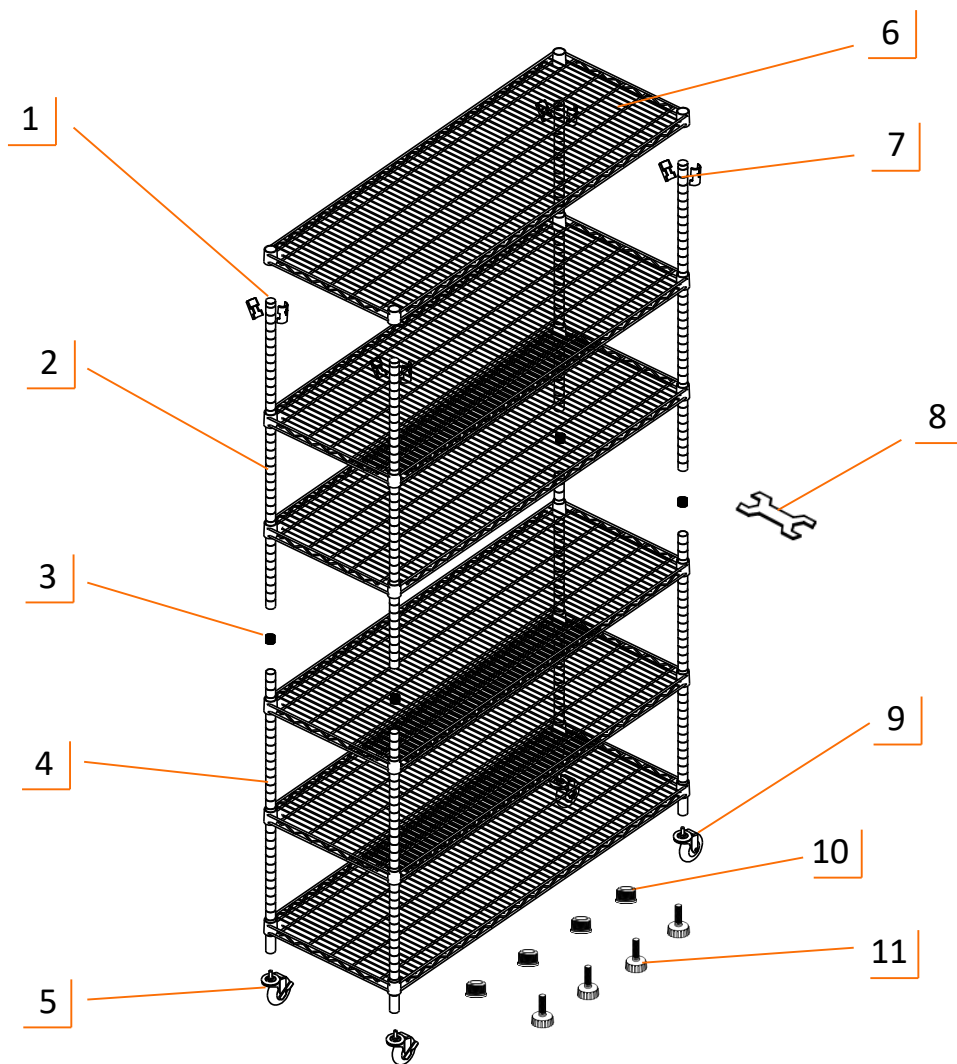

WARNINGS

1. **Read and understand all instructions.** Failure to follow all instructions may result in injury and/or damage.
2. **Tighten all casters completely by using the wrench.** Failure to do as instructed could result in the caster stem breaking, thereby causing the product to collapse.
3. **The warnings, cautions, and instructions discussed in this manual cannot cover all possible conditions or situations that may occur.** The user must always be aware of the environment and ensure to use the product in a safe and responsible manner.
4. **Do NOT modify the product in any way.** Unauthorized modification may impair the function and/or safety of the product, and may affect the life of the product.
5. **Check for damaged parts.** Before using this product, carefully check that all parts are in good condition, and that the product will operate properly and perform its intended function. Check for damaged parts and any other conditions that may affect the operation of this product. Replace damaged or worn parts, and never use this product with a damaged part.
6. **Do NOT overload the product.**

Weight capacity per Shelf on Feet Levelers (evenly distributed)	454.6 kg / 1000 lb
Weight capacity per Shelf on Casters (evenly distributed)	60.6 kg / 133.3 lb
Total weight capacity of Shelving Rack (evenly distributed)	2727.3 kg / 6000 lb (on Feet Levelers) 363.6 kg / 800 lb / (on Casters)

CARE AND MAINTENANCE

- Avoid harsh, abrasive cleaners, and other corrosive chemicals.
- This item is not certified for outdoor use.

PRODUCT REGISTRATION

Thank you for purchasing a TRINITY EcoStorage® 6-Tier NSF Wire Shelving Rack w/ Wheels. In order to register your product and receive streamlined customer service, please fill out the following Product Registration Form and (1) fax the form to 310.347.4134 (2) complete the Product Registration Form online at www.trinityii.com or (3) scan and email the form to customerservice@trinityii.com. Include a copy of your original receipt with your submission.

First Name: _____ Last Name: _____

Address: _____

City: _____ State: _____ Zip Code: _____

Email Address: _____ Phone: _____

Product Model #: TBFZ-0945 Purchase Date: ____ / ____ / ____

Location of Purchase: _____

Please rate the importance of each feature (1=least important; 10=most important)

Quality ____ Price ____ Size/Capacity ____ Appearance ____ Other ____

How did you hear about our product?

- ☐ Magazine Ad ☐ Catalog ☐ Salesperson ☐ Word of Mouth
☐ Internet ☐ Store Display ☐ Other

Marital Status: ☐ Single ☐ Married

Household Income: ☐ Below \$50,000 ☐ \$50,000-\$150,000 ☐ \$150,000+

Education: ☐ High School ☐ College ☐ Graduate School

Primary Residence: ☐ Own ☐ Rent

Comments/Suggestions:



1 YEAR LIMITED WARRANTY

TRINITY EcoStorage® 6-Tier NSF Wire Shelving Rack w/ Wheels Model # TBFZ-0945

Trinity International Industries (“Trinity”) warrants to the original consumer purchaser (“Purchaser”) of the TRINITY EcoStorage® 6-Tier NSF Wire Shelving Rack w/ Wheels (“Product”) that each Product shall be free from defects in workmanship and materials for a period of 1 year from the date of original purchase. Trinity’s obligation under this warranty shall be limited to repair or replacement of, or adequate compensation for the Product which shall not be greater than the amount of the purchase price of the Product, at the option of Trinity, during the warranty period. All replaced parts and Products become the property of Trinity and must be returned to Trinity.

This warranty excludes normal wear and tear of the Product and its parts or components, and damage arising from any of the following: negligent use or misuse of the Product, use contrary to this User’s Manual, or alteration by anyone other than Trinity. The warranty period of 1 year shall not be extended or renewed by the repair or replacement of, or compensation for, the Product. Any warranty implied by applicable law is limited in duration to one year from the date of purchase and is subject to the same conditions and limitations as is provided for our express warranty.

Except as set forth herein, and to the extent of applicable there are no warranties on this Product either express or implied, and Trinity disclaims all warranties including, but not limited to, any implied warranties of merchantability, infringement or fitness for a particular purpose. No warranty or guarantee given by any person, firm, or corporation with respect to this product shall be binding on Trinity.

If your Product is defective or otherwise requires service or parts, please call TRINITY Customer Service toll-free at (800) 985-5506, between 8:00 a.m. and 5:00 p.m., PST. Please tell us which model you purchased, the date of the purchase, and the problem with your Product. A copy of your original purchase receipt must accompany your service request.

LIMITATION OF REMEDIES AND LIABILITY

Trinity (and its employees, officers, members, managers, affiliates and assigns) shall not be liable for any incidental, consequential, special, indirect, remote, special or punitive damages for breach of any warranty, express or implied, including, but not limited to, lost profits, lost savings, loss of anticipated benefits and attorneys’ fees, which arise out of the purchase, use or inability to use the Product, whether arising out of contract, negligence, strict tort, product liability, or any other legal theory on which a claim is based. As noted above, to the extent damages are allowed by our express warranty or by applicable law, those damages may not exceed the purchase price paid for the Product. Without limiting the foregoing Purchaser assumes all risk and liability for loss, damage or injury to Purchaser and Purchaser’s property and to others and their property arising out of the use, misuse, or inability to use this Product. This limited warranty shall not extend to anyone other than the original purchaser of this product, is nontransferable and states your exclusive remedy.

Some states do not allow the exclusion or limitation of incidental, consequential, special, or punitive damages, so the above limitation or exclusion may not apply to you. The above warranty gives you specific legal rights, and you may have other rights which vary from state to state.

CONTACT US

**QUESTIONS? NEED PARTS?
WE ARE HERE TO HELP!**

Please feel free to contact us. There are no questions too small, or any problems too big. We're committed to providing our customers with the highest level of service.

TRINITY Customer Service

TEL: 800.985.5506

FAX: 310.347.4134

EMAIL: customerservice@trinityii.com

**Monday through Friday
8:00 AM – 5:00 PM (PST)**

www.trinityii.com